

SYSTEM





SYSTEM 5630 SEAMLESS COATING SYSTEM FOR RESEARCH

SEAMLESS SYSTEM 5630 is a patented process for creating 360 degrees of seamless protection by enclosing walls, ceilings, floors and joints. 5630 features our highest level of sanitary protections, with a decorative quartz broadcast for flooring and an impenetrable 50 - 60 mil fiberglass-reinforced wall and ceiling component. Wall to floor joints are fused with special reinforcing tape and a smooth and seamless transition is formed between the two surfaces. For the utmost in performance, the entire enclosure can be sealed with a UV-resistant polyaspartic coating.

COMMON APPLICATIONS

5630 is a patented process designed to go over almost any structural substrate including panel systems. It delivers a smoother finish than the 5631 and provides a completely seamless lining from floor to ceiling and eliminates joints, nooks and cavities. Specific applications include, but are not limited to: animal holding and research, laboratories, chemical processing, corridors, cage wash areas, vivariums, and clean rooms.

COMPONENTS


Floors: 320 / 321 / 401 Walls and Ceilings: 242 / 630 / 201

LEED MATRIX [NC 2009]

	YES	NO
MRc1.1 Building Reuse		
MRc2 Construction Waste Management	$-\langle \checkmark \rangle$	
MRc4.1 Recycled Content		\checkmark
MRc6 Rapidly Renewable Materials	$-\langle \checkmark \rangle$	
IEQc4.2 Low Emitting Materials		






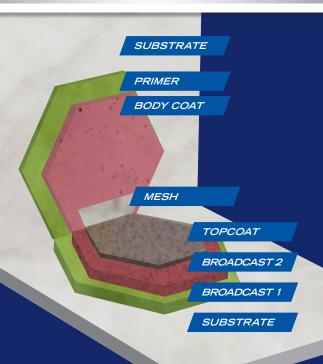

OPTIONS

Cove Bases: Included

Colors: see back panel



Prime Coat offers 3 categories of finish Textures. Texture A is our smoothest finish. Texture B is our mid-level slip resistant finish and Texture C is our highest level slip resistant finish. Custom textures can be engineered to meet specific design requirements. A mock up is recommended as the best way to ensure customer satisfaction.

Antimicrobial: Available

Waterproofing Membrane: Available

Topcoats:


500

511/512

Waterborne urethane in Gloss, Satin and Matte, very good gloss retention, good chemical and abrasion resistance, LEED compliant

Polyaspartic urethane, greater UV

SYSTEM 5630 COLORS For additional or custom system configurations, please contact your Prime Coat Consultant or call us at **877-362-5111**.

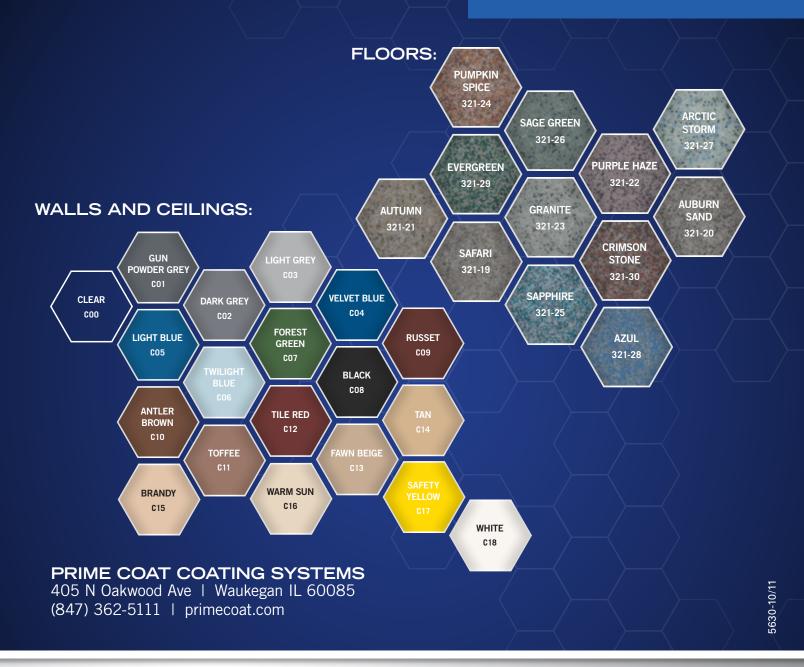



In the unlikely event of a problem, a resolution is one phone call away with the assurance that the blame game will not be a part of the process. Our goal is to develop long lasting relationships with our customers.

WE PLEDGE TO DO WHATEVER WE CAN TO BRING OUR CUSTOMERS THE HIGHEST LEVEL OF SATISFACTION!