

Prime Coat
COATING SYSTEMS™



SYSTEM

SEAMLESS

PATENTED SEAMLESS COATING SYSTEM WITH
EPOXY MORTAR FLOOR FOR RESEARCH FACILITIES

system
5631

SEAMLESS SYSTEM 5631 is a patented process for creating a seamless enclosure for walls, ceilings and floors where sanitation and a bacteria free environment are paramount. 5631 features a ¼” troweled quartz or solid-colored mortar system for flooring and an impenetrable 50 – 60 mil chopped strand fiberglass-reinforced wall and ceiling component. Wall to floor joints are fused with special reinforcing tape and a smooth and seamless transition is formed between the two surfaces.

COMMON APPLICATIONS

5631 is a patented process designed to go over almost any structural substrate including panel systems. Because it incorporates a mortar flooring system it can be used to level damaged concrete and create slope. It can also handle high traffic and high point loading. It delivers a slight orange peel texture and provides a completely seamless lining from floor to ceiling and eliminates joints, nooks and cavities. Specific applications include, but are not limited to: animal holding and research, laboratories, chemical processing, corridors, cage wash areas, vivariums, and clean rooms.

COMPONENTS


Floors: 320 / 321 / 440 or 310 / 324 / 400

Walls and Ceilings: 242 / 630 / 100 / 339 / 200 / 400

LEED MATRIX [NC 2009]

	YES	NO
MRc1.1 Building Reuse	✓	
MRc2 Construction Waste Management	✓	
MRc4.1 Recycled Content		✓
MRc6 Rapidly Renewable Materials	✓	
IEQc4.2 Low Emitting Materials	✓	



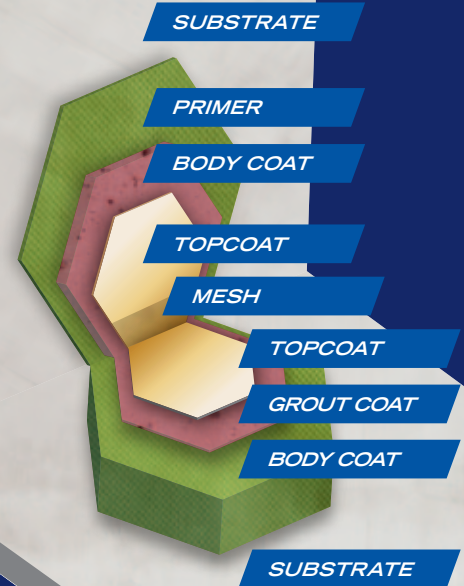

OPTIONS

Cove Bases: Included

Colors: see back panel

Texture	A	B	C
Walls/Ceiling	✓		
Floor	✓	✓	

Prime Coat offers 3 categories of finish Textures. Texture A is our smoothest finish. Texture B is our mid-level slip resistant finish and Texture C is our highest level slip resistant finish. Custom textures can be engineered to meet specific design requirements. A mock up is recommended as the best way to ensure customer satisfaction.

Antimicrobial: Available

Waterproofing Membrane: Available

Topcoats:

500

Polyaspartic urethane, greater UV resistance

511/512

Waterborne urethane in Gloss, Satin and Matte, very good gloss retention, good chemical and abrasion resistance, LEED compliant

SYSTEM 5631

COLORS

For additional or custom system configurations, please contact your Prime Coat Consultant or call us at **877-362-5111**.

FLOORS, WALLS AND CEILINGS:



FLOORS:



PRIME COAT COATING SYSTEMS
405 N Oakwood Ave | Waukegan IL 60085
(847) 362-5111 | primecoat.com

5631-10/11



In the unlikely event of a problem, a resolution is one phone call away with the assurance that the blame game will not be a part of the process. Our goal is to develop long lasting relationships with our customers.

WE PLEDGE TO DO WHATEVER WE CAN TO BRING OUR CUSTOMERS THE HIGHEST LEVEL OF SATISFACTION!